


Part Number: PT228-00925

Section I  Installation Preparation

Kit Contents

Item #	Quantity Req'd.	Description
1	1	Ball mount
2	1	Hardware bag

Hardware Bag Contents

Item #	Quantity Req'd.	Description
1	1	Hitch pin
2	1	Hair-pin cotter pin

Additional Items Required For Installation

Item #	Quantity Req'd.	Description
1		
2		
3		

Conflicts

Note:

Recommended Tools

Safety Tools	
None	
Special Tools	
None	
Installation Tools	
None	
Special Chemicals	
None	

General Applicability






Tacoma V6 4x4 & V6 Pre Runner

Recommended Sequence of Application

Item #	Accessory	P/N
1	Fan Coupling	08921-04950
2	Tow Hitch	PT228-04020
3	Wire Harness	08921-04810-AA


*Mandatory

Legend


	STOP: Damage to the vehicle may occur. Do not proceed until process has been complied with.
	OPERATOR SAFETY: Use caution to avoid risk of injury
	CRITICAL PROCESS: Proceed with caution to ensure a quality installation.
	GENERAL PROCESS: This highlights specific processes to ensure a quality installation.
	TOOLS & EQUIPMENT: This calls out the specific tools and equipment required for this process

Section II [] Installation Procedure



A. Read Owner's Manual



-  1. Read owner's manual on trailer towing, weight limits, and all other hitch, towing, and safety items.

B. Trailer Ball Mount Installation

-  1. Install ball mount in the orientation shown in Fig. B-1.



 **NOTE: DO NOT INSTALL** the Ball Mount with the tongue facing down. (Fig. B-2)

-   2. Line up hitch pin holes in receiver and trailer ball mount.

-   3. Install hitch pin and hair-pin cotter pin (Fig. B-1)

C. Trailer Ball

- 1. Use only a trailer ball rated at or greater than the vehicle tow rating.

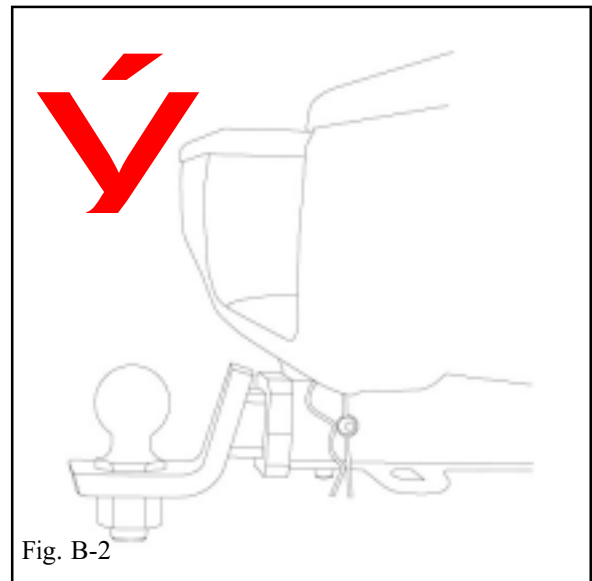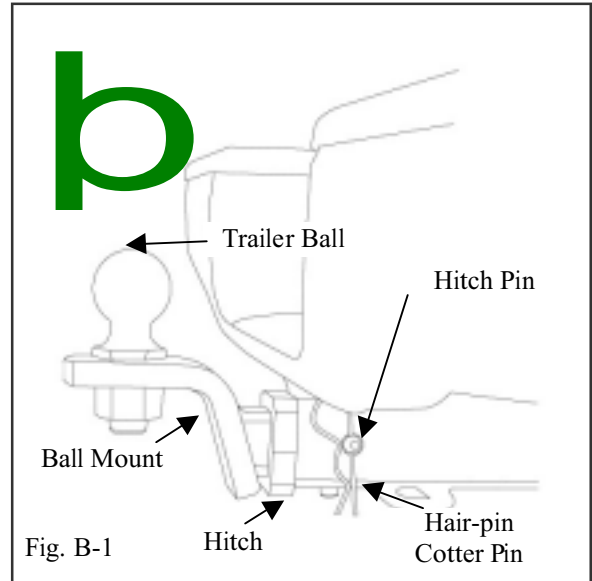

Section III [] Functional Verifications

Check: _____

Visual check

Look For: _____

Trailer ball mount installed in the correct orientation

Hair-pin cotter pin is installed