

TOYOTA

SERVICE BULLETIN

TOYOTA MOTOR SALES, U.S.A., INC.

VOLUME

10

REFERENCE BODY
NUMBER 025
DATE 01-05-90
MODEL ALL MODELS

Page 1 of 4

AUXILIARY ANCHOR POINT FOR FRONT SHOULDER BELT

The use of auxiliary anchor points for front shoulder belts has been approved for Toyota models beginning with the 1987 model year.

These alternate locations should be used **only** when front seat occupants are inconvenienced by the original shoulder belt anchorage location.

MODEL APPLICATION:

MODEL/SERIES	YEAR:
Tercel (EL Series)	1987 —▶
Corolla (AE9 Series)	1988—89
Camry (SV Series)	NA
Celica (ST Series)	1987 —▶
Cressida (MX 7,8 Series)	NA
Supra (MA7 Series)	1986.5 —▶
MR2 (AW1 Series)	1987—90
Van (YR Series)	1987 —▶
Truck/4Runner (VN—RN 8,9 Series)	1989 —▶
Land Cruiser (FJ Series)	1990.5 —▶


RELOCATION PROCEDURE:

1. Remove the shoulder belt anchor cover and the anchor bolt.
2. Remove the center pillar garnish.
3. Drill a 25mm diameter hole in the garnish molding for the shoulder belt anchor bolt.
4. Install the modified garnish molding.
5. Install the shoulder belt anchor bolt through the new hole in the garnish molding.
6. Install the shoulder belt anchor cover.
7. The original anchor bolt hole in the garnish molding should be covered with a hole plug, part number 90950-01159-11 (**Available in Black only**).

AUXILIARY ANCHOR POINT FOR FRONT SHOULDER BELT (Cont'd)

AVAILABILITY AND LOCATION OF THE ANCHOR SHOULDER BELT ANCHOR POINT

Model Year	Model	Auxiliary Anchorage		Point	
		*1 Availability	*2 Dimension H (mm)		
			Driver	Passenger	ID Mark on Pillar Garnish
1987 to 1990	Tercel	Yes	53	53	5mm Dimple on outer surface
1987	Corolla S/D	Yes	51	76	"
1987	Corolla C/P	Yes	53	53	"
1987 to 1988	Corolla FX	Yes	44.5	44.5	Cross mark on inner surface
1988 to 1990	Corolla S/D (USA)	Yes	78.3	78.3	5mm Dimple on outer surface
1988 to 1990	Corolla S/D (Canada)	Yes	78.3	78.3	"
1988 to 1989	Corolla C/P (USA)	Yes	47.9	47.9	"

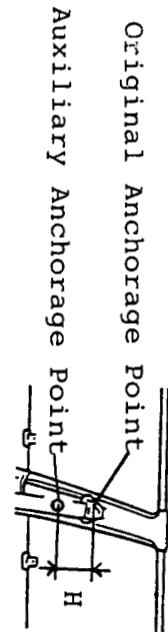

AUXILIARY ANCHOR POINT FOR FRONT SHOULDER BELT (Cont'd)

AVAILABILITY AND LOCATION OF THE ANCHOR SHOULDER BELT ANCHOR POINT

Model Year	Model	*1 Availability	Auxiliary Anchorage		Point
			*2 Dimension Driver	H (mm) Passenger	
1988 to 1990	Corolla	Yes	47.9	47.9	ID Mark on Pillar Garnish
1990	Corolla S/D (USA)	NOT APPLICABLE			
1990	Corolla C/P (USA)	"			
1987 to 1990	Camry	NOT APPLICABLE			
1987 to 1989	Celica	Yes	62.5	62.5	5mm Dimple on outer surface
1990	Celica	Yes	65	65	"
1987 to 1990	Supra	NOT APPLICABLE			
1987 to 1990	Cressida	NOT APPLICABLE			
1987 to 1989	MR2	Yes	54.5	54.5	(25mm) Circle on inner surface
1990 (1/2)	MR2	NOT APPLICABLE			

AUXILIARY ANCHOR POINT FOR FRONT SHOULDER BELT (Cont'd)

AVAILABILITY AND LOCATION OF THE ANCHOR SHOULDER BELT ANCHOR POINT

Model Year	Model	Auxiliary Anchorage		Point	
		*1 Availability	*2 Dimension H (mm)		
			Driver	Passenger	
1987 to 1990	Van	Yes	40	40	Circle on inner surface
1987 to 1988	Truck Regular Cab	Yes	55	55	5mm Dimple on outer surface
	Truck Xtra Cab	"	75	75	"
	4-Runner	"	55	55	"
1989 to 1990	Truck Regular Cab	Yes	39	39	5mm Dimple on outer surface
	Truck Xtra Cab	"	39	39	"
	4-Runner	"	37	37	"
1987 to 1990 (1/2)	LandCruiser	NOT APPLICABLE			
1990 (1/2)	LandCruiser	Yes	68	68	NOT APPLICABLE