

TOYOTA

SERVICE BULLETIN

TOYOTA MOTOR SALES, U.S.A., INC.

VOLUME

10

REFERENCE BODY
NUMBER 026
DATE 01-05-90
MODEL SV, VV, MX

Page 1 of 2


CAMRY/CRESSIDA FRONT INNER SHOULDER BELT GUIDE

A front inner shoulder belt guide is now available to improve seat belt comfort by keeping the belt on the shoulder and away from the neck and face. Install the guide by following the instructions for the specific model as described below:

MODEL	PART NO.	PART NAME
1987 – 1990 Camry	73176-32010 73177-32010	Hanger, Fr. Shoulder Belt, RH Hanger, Fr. Shoulder Belt, LH
1985 – 1988 Cressida	73176-22020 73177-22020	Hanger, Fr. Shoulder Belt, RH Hanger, Fr. Shoulder Belt, LH
1989 – 1990 Cressida	73176-22030 73177-22030	Hanger, Fr. Shoulder Belt, RH Hanger, Fr. Shoulder Belt, LH

INSTRUCTIONS FOR ASSEMBLING HANGER, 1987 - '90 CAMRY

1. Remove seat & seat side inner garnish molding.
2. Remove extension from seat belt bracket
3. Insert hanger between spring washer & extension.
Insert & tighten bolt. (Make sure the hook on seat belt bracket meshes with hanger & extension).
4. Assemble seat side inner garnish to seat.
5. Install seat into car.

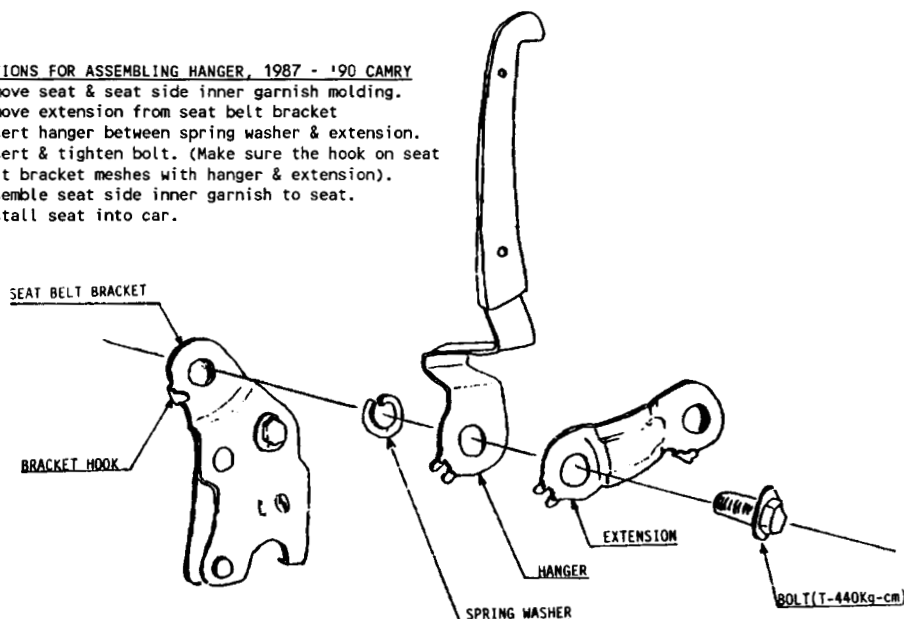


TECHNICAL ASSURANCE DEPARTMENT

CAMRY/CRESSIDA FRONT INNER SHOULDER BELT GUIDE (Cont'd)

INSTRUCTIONS FOR ASSEMBLING HANGER, 1985 - '88 CRESSIDA

1. Remove seat & seat side inner garnish molding.
2. Remove extension from seat belt bracket.
3. Insert hanger between spring washer & extension. Insert & tighten bolt. (Make sure the hook on seat belt bracket meshes with hanger & extension).
4. Assemble seat side inner garnish to seat.
5. Install seat into car.

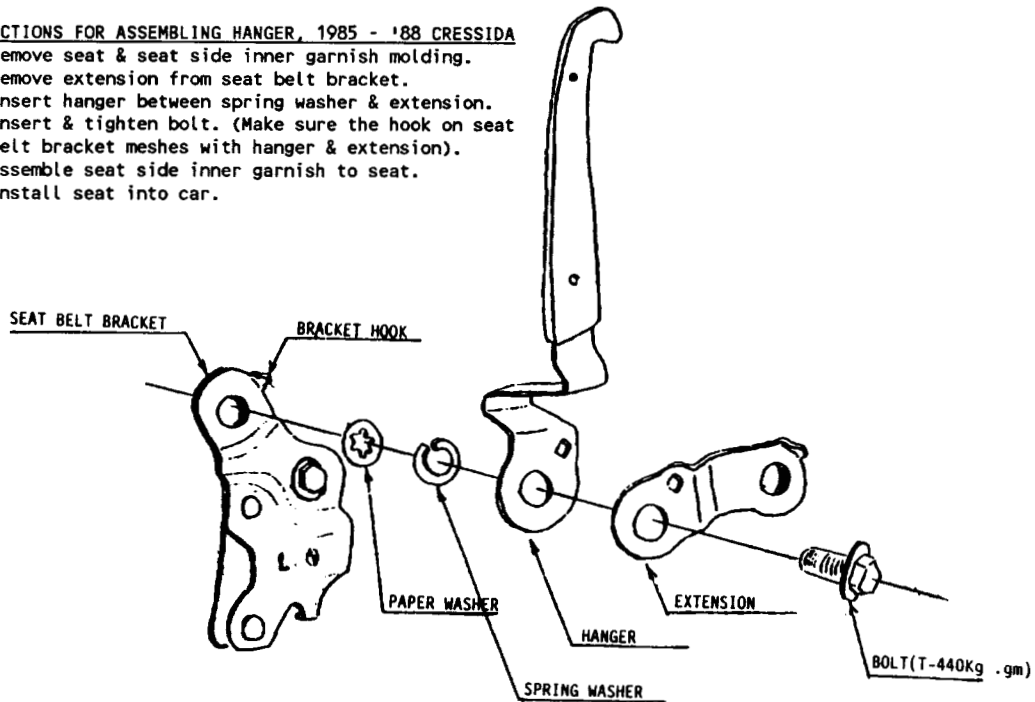

INSTRUCTIONS FOR ASSEMBLING HANGER, 1989 - '90 CRESSIDA

1. Remove seat & seat side inner garnish molding.
2. Remove buckle assembly from seat belt bracket.
3. Insert hanger between buckle assembly and bolt. Insert & tighten bolt. (Make sure the hook on seat belt bracket meshes with buckle assembly & hanger).
4. Cut opening for end of hanger (where marked) to be inserted on outer side of seat where attached. (see diagram).
5. Assemble seat side inner garnish to seat.
6. Install seat into car.

