



# TECHNICAL SERVICE BULLETIN

REF.: ELECTRICAL  
 NO.: EL95-006  
 DATE: DECEMBER 22, 1995  
 MODEL: 4RN

## DOM FUSE INSTALLATION DURING PDS ON 1996 4RUNNER

Page 1 of 1



To minimize battery discharge during transportation and storage, the Dome Fuse has been removed at the assembly plant.

### INSTALLATION PROCEDURE:

The removed Dome Fuse (15A) is stored in the back of the Engine Room Relay Block Cover in the engine compartment as shown in Figure A.

Please install the Dome Fuse in the correct position during (Pre-Delivery Service) as shown in Figure B.

**NOTE:** If the vehicle is stored at the dealership for a long period of time after PDS, please disconnect the negative battery terminal to prevent battery discharge and refer to TSB EL95-001 for battery maintenance information.

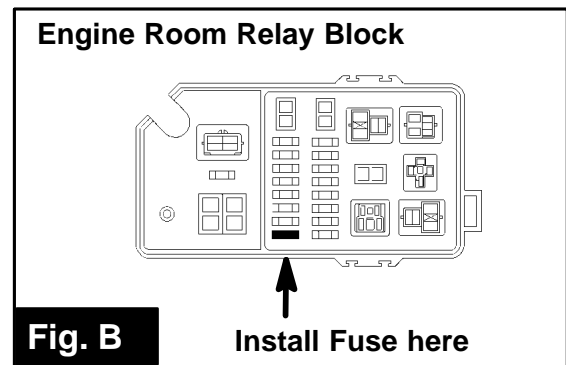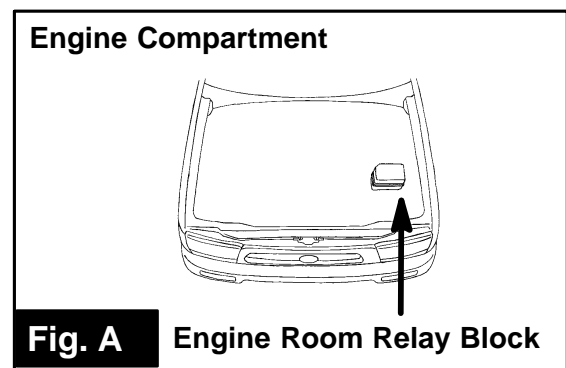

### INFORMATION LABEL:

An information label will be placed on the upper passenger side of the front windshield as shown in Figure C. Remove this label after installing the Dome Fuse.

