



Technical Service BULLETIN

January 11, 2002

Title:

DOME FUSE INSTALLATION DURING PDS

Models:

'03 – '06 Matrix

TSB

REVISED

PG004-02

PRODUCT GENERAL INFORMATION

TSB REVISION NOTICE:

- August 3, 2005: 2004 – 2006 model years have been added to Applicable Vehicles. The previous TSB should be discarded.

Introduction To minimize battery discharge during transportation and storage, the DOME fuse has been removed at the assembly plant.

Applicable Vehicles • 2003 – 2006 model year **Matrix** vehicles.

Affected Systems Removal of the DOME fuse will affect the following systems:


- Door lock control
- Radio and CD changer
- Interior lights
- Combination meter
- Key reminder and seat belt warning

Warranty Information

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	–	–	–	–

Installation Procedure

1. The DOME fuse (15A) is stored in the blank space in the Relay Block in the engine compartment.

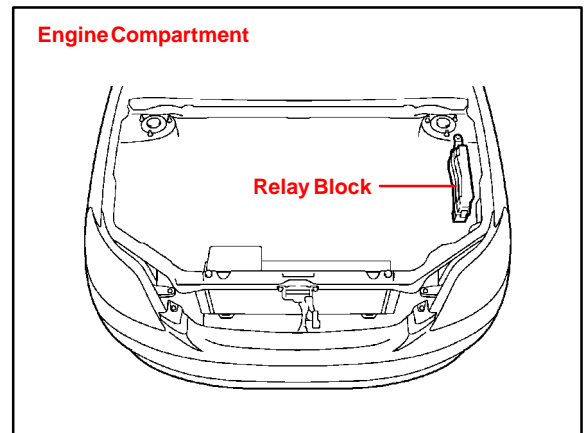

Installation Procedure
(Continued)

2. During Pre-Delivery Service (PDS), install the DOME fuse in the Relay Block as shown.

NOTE:

If the vehicle is stored in the dealership for a long period of time after PDS, disconnect the negative (-) battery terminal to prevent battery discharge. Refer to TSB No. PG017-02, “*Battery Maintenance for In-stock Vehicles & Pre-Delivery,*” for battery maintenance information.

