



**Technical Service
BULLETIN**

December 14, 2001

Title:

FRONT LICENSE PLATE MOUNTING BRACKET INSTALLATION DURING PDS

Models:

'03 – '06 Matrix

REVISED

PRODUCT GENERAL INFORMATION
PG021-01


TSB REVISION NOTICE:

- August 3, 2005: 2004 – 2006 model years have been added to Applicable Vehicles. The previous TSB should be discarded.

Introduction The 2003 – 2006 model year Matrix front license plate bracket and two attaching screws are placed in the hatchback of the vehicle at the assembly plant. For states that require a front license plate, install the bracket on the front bumper cover during Pre-Delivery Service (PDS) according to the following procedures.

- Applicable Vehicles**
- 2003 – 2006 model year **Matrix** vehicles.

- Installation Procedure**
1. Align the holes of the mounting bracket with the dimples on the front bumper.
 2. Using the two self-tapping screws, install the mounting bracket to the front bumper.

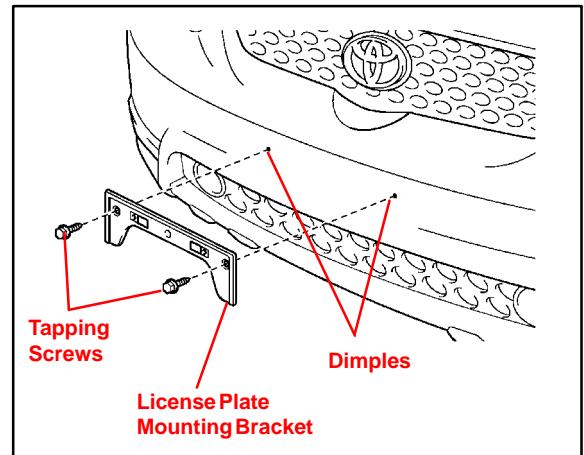

NOTE:

- Do **NOT** drill holes in the dimples.
- Tighten the driver's side screw first; then tighten the passenger's side screw.

3. Install the front license plate to the bracket using self-tapping screws of a non-corroding type having the following size:
Length: 15.0 – 18.0 mm (0.59 – 0.71 in.)
Diameter: 6.0 mm (0.24 in.)
Pitch: 1.0 mm (0.04 in.)

NOTE:

Do not use bolts longer than the specified nominal length.

Warranty Information

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	–	–	–	–

