



**Technical Service BULLETIN**

May 31, 2007

Title:

**ROOF RACK LEG COVER INSTALLATION DURING PDS**

Models:

'08 Highlander & Highlander HV

PRE-DELIVERY SERVICE  
PD035-07

**Introduction** To prevent damage to the roof rack leg cover prior to installation of the crossbars, the leg covers are not installed from the factory. Install the roof rack leg covers according to the following procedure during Pre-Delivery Service (PDS). Crossbars for DIO should be installed prior to the installation of the roof rack leg covers.


**Applicable Vehicles**

- **2008** model year **Highlander** and **Highlander HV** vehicles.

**Installation Procedure** For roof rack crossbar installation, follow the installation instructions found on the Technical Information System (TIS).

**NOTE:**  
The roof rack leg covers are stored in the vehicle's cargo area.

1. Insert the tab at the front of the cover into the roof rack rail.
2. Place the cover on the leg and align the rear part of the cover. Do NOT press down.
3. Press the cover claws facing the outside of the vehicle into place.
4. Press the cover claws facing the inside of the vehicle into place.

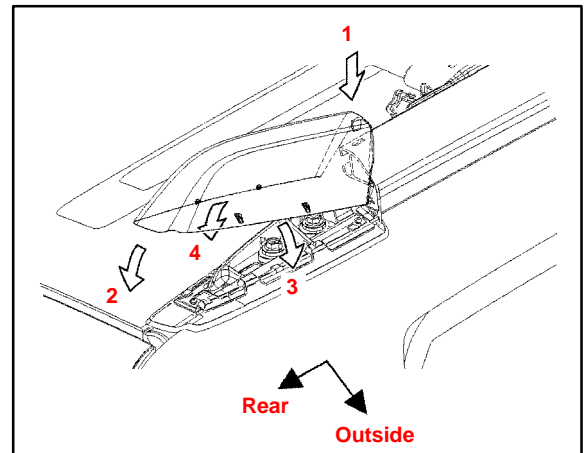

**NOTE:**  
Do NOT press the claws facing the outside of the vehicle at the same time as pressing the claws facing the inside. The leg cover may be damaged.

5. Check that the roof rack leg cover is installed securely.

**Warranty Information**

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-

