



**Technical Service
BULLETIN**

June 26, 2007

Title:

**FLOOR MAT RETAINING CLIP
INSTALLATION DURING PDS**

Models:

'08 FJ Cruiser

P D070-07
PRE-DELIVERY SERVICE

Introduction The 2008 model year FJ Cruiser vehicles are equipped with 4 floor mat retaining clips to ensure that the floor mats stay in the correct position. The 2 outer retaining clips are placed in the glove box at the factory and must be installed during Pre-Delivery Service (PDS).

IMPORTANT:

- Make sure the floor mat is properly placed on the vehicle carpet and secured with the 2 locking clips. If the floor mat slips and interferes with the movement of the pedals during driving, it may cause an accident.
- NEVER install more than one floor mat at a time in the driver's seating position.

Applicable Vehicles

- 2008 model year **FJ Cruiser** vehicles.

Required Tools & Material

TOOLS & MATERIAL	QUANTITY
Small Flat-tip Screwdriver	1
Utility Knife	1


Warranty Information

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-




Installation Procedure


1. Remove the outer floor mat retaining clips from the glove box.
2. Using a small flat-tip screwdriver, pry the retaining clip flap up.

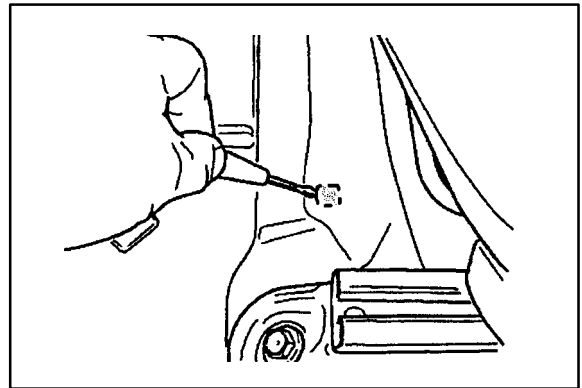


3. Using a utility knife, remove the retaining clip flap.

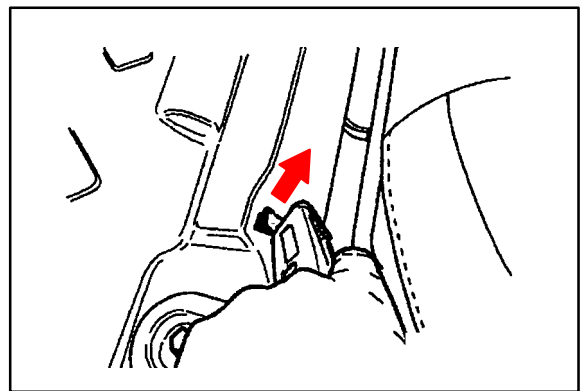

4. Insert the floor mat retaining clip insert nut into the mounting hole.

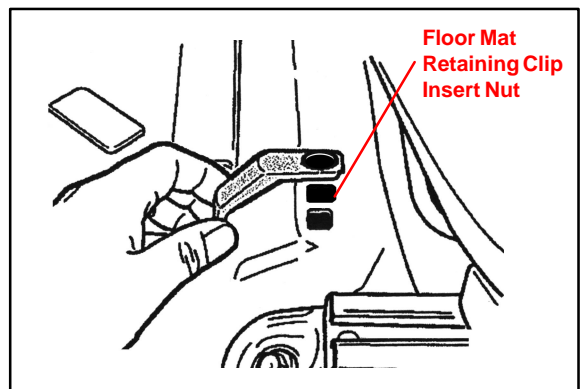

5. Using a screwdriver, secure the floor mat retaining clip in place with the provided screw.

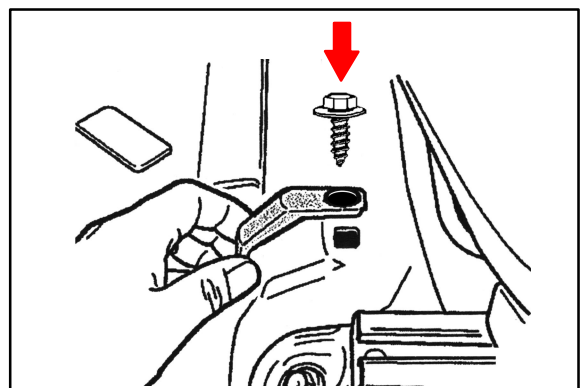

**Installation
Procedure**
(Continued)

6. Hook the floor mat onto the retaining clips (2 places) and then place the mat into position.
7. Follow the same procedure for the other side.

NOTE:

If the floor mat retaining clips are NOT installed, the floor mats can move while driving and when passengers get in and out of the vehicle.

